

## SC-1150

Screen Channel Loudspeaker for Small Rooms

## **Features**

- Single enclosure two-way screen channel loudspeaker
- Optimized for small room applications up to 45 feet (14 meters) from screen to last row of seating
- Requires less than 12 inches (305 mm) behind screen
- Passive crossover requires only one amplifier channel
- 90° Axisymmetric horn
- •15" (380 mm) woofer with 3" (76 mm) voice coil
- 1.75" (44 mm) voice coil HF compression driver
- Screw-type barrier-strip connectors



The SC-1150 extends QSC's commitment to the cinema market by offering high-quality QSC sound for small room systems. As a member of the DCS Digital Cinema Series, the SC-1150 is a cost-effective screen channel loudspeaker for cinemas no longer than 45 feet (14 meters) from the screen to the last row of seating. The SC-1150 features a 15" (380 mm) woofer with 3" (76 mm) voice coil for exceptional low frequency bandwidth reproduction. The LF driver crosses over into a high frequency compression driver with 1.75" (44 mm) voice coil. Both drivers are combined in a single enclosure, simplifying installation. The front baffle of the SC-1150 is treated with sound absorbing material, reducing behind screen acoustical reflections.

The SC-1150 provides coverage over a 90° angle, ideal for small room cinema sound applications. Installation is as simple as removing the SC-1150 from its carton and positioning it behind the screen. The enclosure was designed to be mounted on a platform and its shallow depth (less than 12 inches or 305 mm) dramatically reduces space requirements behind the screen.


## SC-1150 Details

System Details	SC-1150
Rated Coverage Angle (-6 dB)	90 degrees Axisymmetric
Frequency Range <sup>1</sup> (-10dB)	43 Hz to 19 kHz
Rated Noise Power (Voltage) <sup>2</sup>	400 W
Sensitivity <sup>3</sup>	96 dB
Maximum continuous SPL <sup>4</sup>	122 dB
Maximum peak SPL <sup>4</sup>	128 dB
Rated Impedance	8Ω
Maximum Recommended Amplifier Power	600 Watts
Transducers	LF: 15 in. (380 mm) woofer HF: Compression driver with 1.75" (44 mm) voice coil
Enclosure Details	
Input Connector	4-position barrier strip
Enclosure Material	MDF, non-reflective black vinyl
Grille	None
Dimensions (HxWxD)	27.2 x 30 x 11.7 inches (690 x 762 x 297 mm)
Net Weight	71 lb (32.3 kg)

As part of QSC's ongoing commitment to product development, specifications are subject to change without notice.

## Footnotes

- 1 Free-field, unprocessed, -10 dB from on-axis sensitivity
- 2 AES2-1984 noise signal for 2 hrs
- 3 On-Axis, free-field sensitivity, 2.83V, 1 m 4 Calculated from rated noise voltage and sensitivity

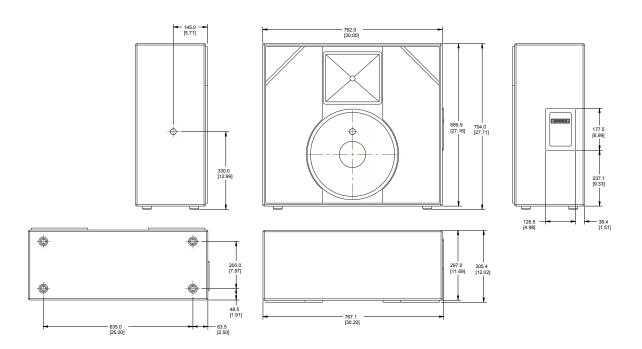

Specifications subject to change without notice.





1675 MacArthur Boulevard • Costa Mesa, CA 92626 • Ph: 800/854-4079 or 714/957-7100 • Fax: 714/754-6174